



EFL302/EFL352

Autoelevador Eléctrico 3.0T. y 3.5T con Batería de Litio

- Batería de ION Litio
- Bajo Mantenimiento
- Fácil Manejo
- Excelente Visibilidad
- Control de gestión por software (opcional)

CARACTERÍSTICAS DESTACADAS

■ ION Litio Tecnología


EFL302/EFL352 adapta la batería de iones de litio LFP que evita que la batería se encienda automáticamente y garantiza un funcionamiento seguro. Cargas de Oportunidad: se puede cargar en el momento preferible durante el día sin interrumpir los horarios de trabajo.



■ Bajo Mantenimiento


En comparación con un Autoelevador Diésel, EFL302/EFL352 ahorra entre un 30% y un 50% del coste energético con ION Litio.

No necesita mantenimiento de filtro de aire, de aceite, aceite de motor ó batería de arranque.



■ Fácil Manejo

El Autoelevador está equipado con electrohidráulica en el sistema de frenado. El sistema acorta el distancia de frenado para garantizar la seguridad, reduciendo la fatiga de conducción.

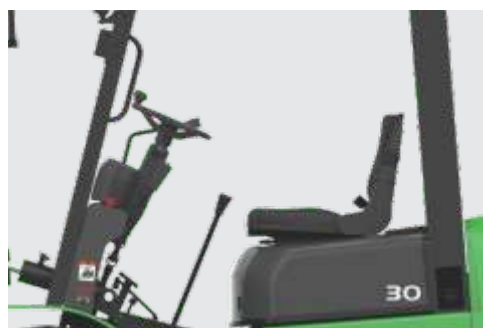

■ Excelente Visibilidad

Equipado con Mástil de amplia visión que garantiza una buena visibilidad durante la operación y permite al conductor un mejor control de la carga.



■ Control de Gestión por Software (opcional)

EFL302/EFL352 ofrece lo último en telemática de EP como opción. Proporciona las siguientes funciones para control de la gestión del equipo:



- Ubicación en tiempo real
- Informes de uso y diagnóstico
- Análisis del estado de la batería de iones de litio
- Actualizaciones sobre el manejo del conductor, con tarjeta




TABLA DE PARÁMETROS

				EP	EP
Distinguishing mark	1.1	Manufacturer			EP
	1.2	Model designation			EFL302
	1.3	Drive			Electric
	1.4	Operator type			Seated
	1.5	Load capacity	Q	kg	3000
	1.6	Load center distance	c	mm	500
	1.8	Load distance @ centre of drive axle to fork	x	mm	481
	1.9	Wheelbase	y	mm	1750
	Service weight	2.1	Service weight		kg
2.2		Axle loading, laden front/rear		kg	6420/660
2.3		Axle loading, unladen front/rear		kg	1740/2340
Tyres/chassis	3.1	Tyre type			Solid rubber
	3.2	Tyre size, front			28X9-15
	3.3	Tyre size, rear			6.50-10
	3.5	Wheels, number front/rear (x=drive wheels)		mm	2x/2
	3.6	Tread width, front	b10	mm	1010
	3.7	Tread width, rear	b11	mm	980
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	°
4.2		Retracted mast height	h1	mm	2070
4.3		Free lift	h2	mm	120
4.4		Lift height	h3	mm	3000
4.5		Height, mast extended	h4	mm	4110
4.7		Height of overhead guard (abin)	h6	mm	2160
4.8		Seat height/standing height	h7	mm	1130
4.12		Tow coupling height	h10	mm	320
4.19		Overall length	l1	mm	3780
4.20		Length to face of forks	l2	mm	2710
4.21		Overall width	b1/b2	mm	1230
4.22		Fork dimensions	s/e/l	mm	45x125x1070
4.23		A,B Fork carriage class/type A, B			3A
4.24		Fork carriage width	b3	mm	1150
4.31		Ground clearance, laden, below mast	m1	mm	120
4.32		Ground clearance, center of wheelbase	m2	mm	150
4.34.1		Aisle width for pallets 1000x1200 crossways	Ast	mm	4181
4.34.2		Aisle width for pallets 800x1200 crossways	Ast	mm	4381
4.35		Turning radius	Wa	mm	2500
Performance data		5.1	Travel speed, laden/unladen		km/h
	5.2	Lifting speed, laden/unladen		m/s	0.29/0.36
	5.3	Lowering speed, laden/unladen		m/s	0.4/0.43
	5.5	Drawbar pull, laden/unladen		N	—
	5.6	Max. drawbar pull, laden/unladen		N	—
	5.8	Max. gradeability, laden/unladen		%	15/15
	5.10	Service brake			Hydraulic
	5.11	Parking brake			Mechanical
Electric-engine	6.1	Drive motor rating S2 60 min		kW	10
	6.2	Lift motor rating at S3 15%		kW	12
	6.4	Battery voltage/nominal capacity		V/Ah	80/205
	6.5	Battery weight		kg	—
Addition data	8.1	Type of drive control			AC
	10.5	Steering design			Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	74


If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

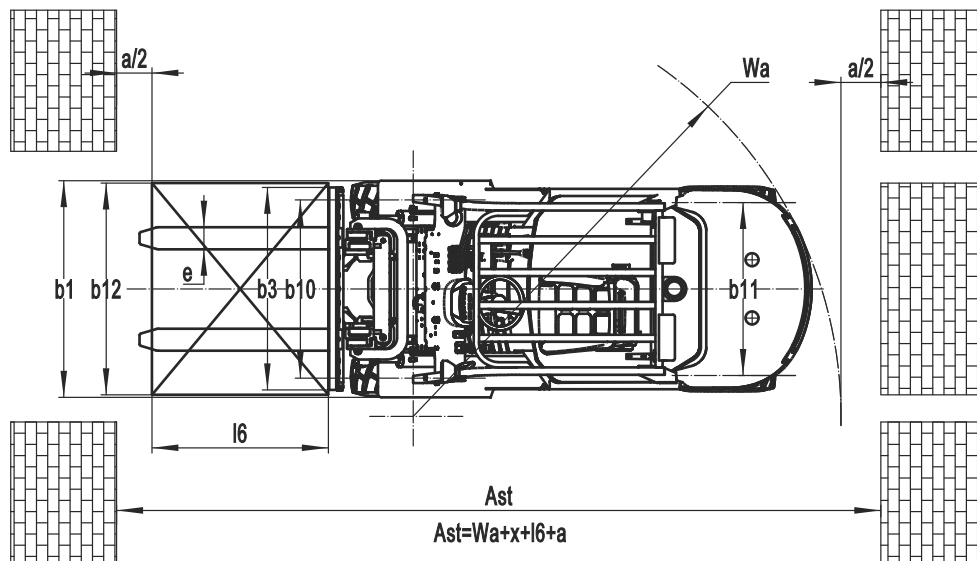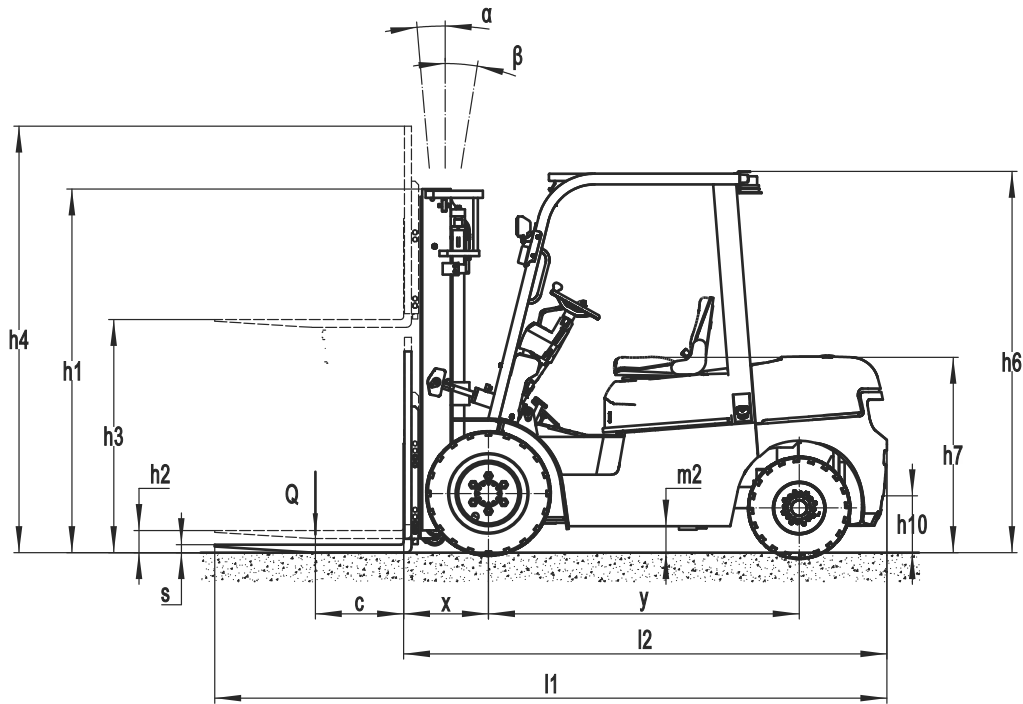

RATED CAPACITIES AND LOAD CENTERS GRAPH

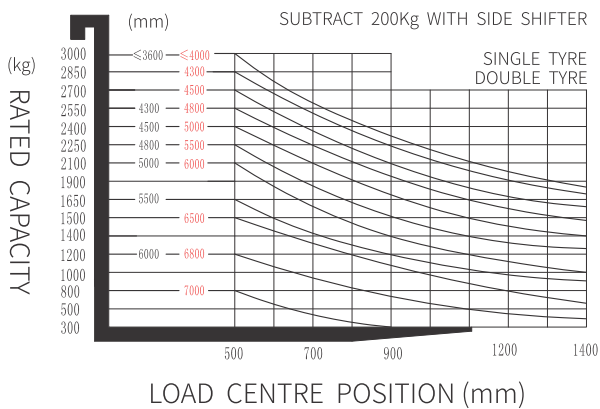

RATED CAPACITIES AND LOAD CENTERS GRAPH

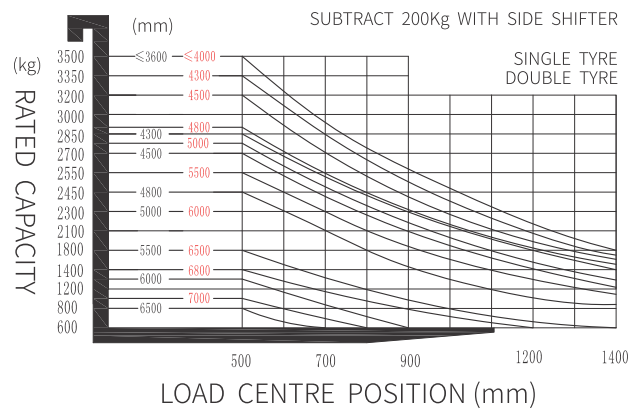

Opcionales de Mástil

Mast types	Lift height (h3) mm	Height, Mast			Height, Free lift(h2)	
		Height, mast lowered(h1) mm	Height, mast extended(h4)		No shelving mm	With shelving mm
			No shelving mm	With shelving mm		
2-Standard Mast	2700	1920	3270	3810	120	120
	3000	2070	3570	4110	120	120
	3300	2220	3690	4410	120	120
	3500	2320	3890	4610	120	120
	3600	2370	3990	4710	120	120
	4000	2620	4040	5110	120	120
	4300	2770	4340	5410	120	120
	4500	2870	4290	5610	120	120
2-Free Mast	2500	1805	2220	3610	1210	560
	2700	1905	2320	3810	1310	660
	3000	2055	2620	4110	1460	810
	3300	2205	3870	4410	1610	960
	3600	2355	4020	4710	1760	1110
3-Free Mast	4300	2095	4910	5410	1360	730
	4500	2175	5070	5610	1460	810
	4800	2280	5375	5910	1565	915
	5000	2365	5570	6110	1610	960
	5500	2615	6150	6610	1770	1120
	6000	2865	6570	7110	2020	1370

Opcionales

No.	Optional items	EFL302	EFL352
1	Fork length	●1070○customization consultation	●1070○customization consultation
2	Attachments	●NA○integrated side shifter○external side shifter ○ customization consultation	●NA○integrated side shifter○external side shifter ○ customization consultation
3	Overhead guard	●normal overhead guard ○customization consultation	●normal overhead guard ○customization consultation
4	Front wheel configuration	●single○dual	●single○dual
5	Tyre type	●Solid rubber tire ○Environmental solid tire	●Solid rubber tire ○Environmental solid tire
6	Front light	●LED front light	●Front light○LED front light
7	Auxiliary light	●NA○Back light	●NA○Back light
8	Safety components	●NA○Fire extinguisher○blue light	●NA○Fire extinguisher○blue light
9	Seat	●normal seat○suspension seat	●normal seat○suspension seat
10	Cockpit	●NA○Cockpit○With fan heater○With front windshield wiper○With rear windshield wiper	●NA○Cockpit○With fan heater○With front windshield wiper○With rear windshield wiper
11	Rearview	●single○dual	●single○dual
12	Air fan	●NA○single	●NA○single
13	Charging	●80V65A○80V130A○80V200A○80V60A ¹ integrated ²	●80V65A○80V130A○80V200A○80V60A ¹ integrated ²
14	Li-Ion battery	●80V205Ah○80V280Ah○80V410Ah	●80V280Ah○80V410Ah

Note: ● standard ○ option — NA